SpiralVeyor® SVX-DL *Dual Lane*

- Continuous elevator / buffer system
- Two or more parallel product flows
- Designed for high capacity dual lane packing lines
- Space-saving design
- Patented design

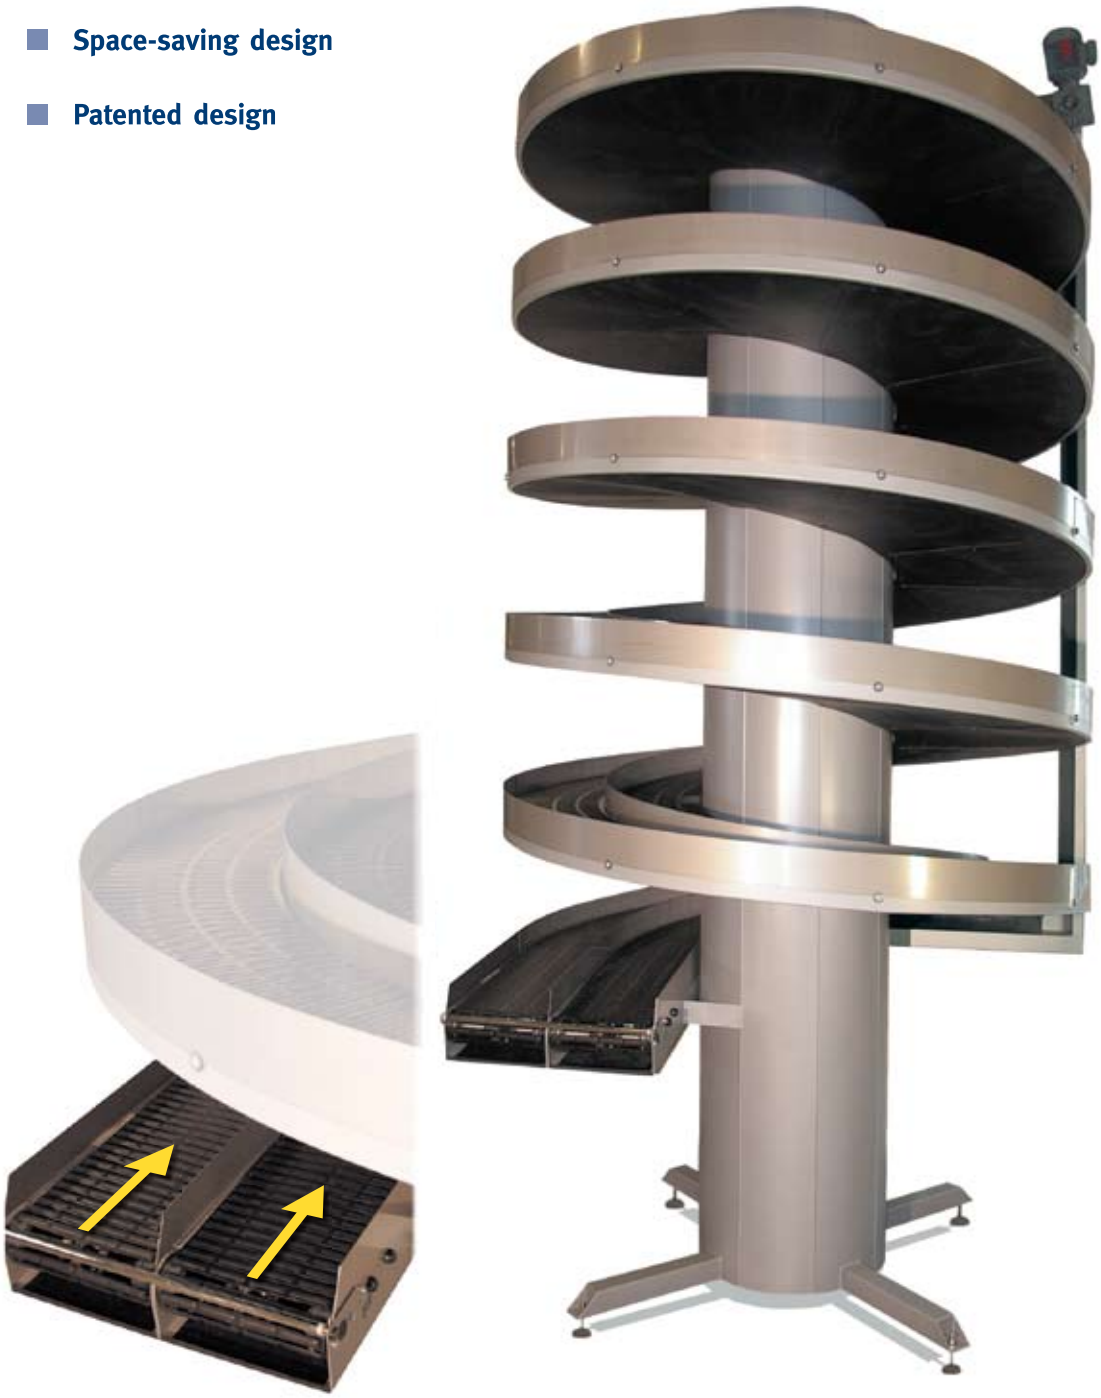

AmbaFlex
www.ambaflex.com

specialty conveyors

SpiralVeyor® SVX-DL

The SpiralVeyor® SVX DL-series (Dual Lane) is designed to elevate packed items like boxes, six packs, bundles and wrapped bottle packs. Technology wise comparable with the popular SpiralVeyor® SV the SVX (X stands for Extended) is fitted with more belt lanes to accommodate different product flows in one machine.

This unique feature allows multiple product lines to elevate side by side, ideally catering to modern packaging lanes which produce in dual lanes. Each line speed can be controlled separately and even run in opposite directions.

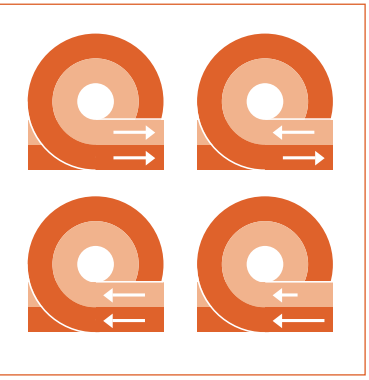

General features:

The general and distinctive feature match those of the SpiralVeyor® SV.

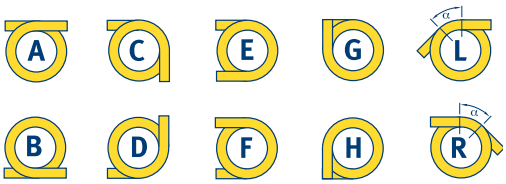

Technical specifications:

- The belt width ranges from 200 – 600 mm per belt.
- Two or three belts running parallel.
- Belt speed up to 90 m/min.
- Loads up to 50 kg/m per lane.
- Angle of incline up to 15 degrees.

Material configurations:

S Mild steel, coated.

CR High Corrosion resistant coated mild steel frame, stainless parts and a special CR-chain.

RS Stainless steel frame and moving parts (wash down / wet environment).

Alternative machines:

- SpiralVeyor® SV Similar but with one lane only.
- SpiralVeyor® SVX EB-series (Extended Belt). Similar machine where parallel belts are used as one belt to accommodate oversized products.
- For smaller belt width or mass flow application we refer to the SpiralVeyor® SVM.

SpiralVeyor®	Belt configuration	Foot print
SVX-2/200	2 x 200 mm	1.720 mm square
SVX-3/200	3 x 200 mm	2.200 mm square
SVX-2/300	2 x 300 mm	2.200 mm square
SVX-2/400	2 x 400 mm	2.620 mm square
SVX-200/600	1 x 200, 1 x 600 mm	2.520 mm square
Other combinations: 200, 300, 400, 600 mm		

More info:

- For Spiral Elevators: www.spiralveyor.com
- For Accumulation Systems: www.accuveyor.com
- For Modular Conveyors: www.ambaveyor.com

AmbaFlex
www.ambaflex.com

Office EUROPE, Holland — mail@ambaflex.com — **phone** +31 (0)229 285 130 — **fax** +31 (0)229 285 131
Office NORTH AMERICA, USA — info@ambaflex.com — **phone** (877) 800 1634 — **fax** (877) 800 1635
Office ASIA, Singapore — info_singapore@ambaflex.com — **phone** (65) 6560 2866 — **fax** (65) 6554 2868

© AmbaFlex International bv, 0908-SVX-DL-E